

BEAUTIFUL FLOORS FOR A WELL-DESIGNED LIFE

HDF LAMINATE FLOORING
THICKNESS 12 mm



SURYA CLICKTM
Premium



T7

15036 | TEAK ALLOVER



T7

15038 | RUBY ALLOVER



T7

15037 | MILLS CHERRY ALLOVER



T7

15039 | RELIEF OAK ALLOVER



T3

15040 | MARGO ALLOVER



T3

15041 | IMPIANA NYATOH



T3

15042 | KAHLUA OAK ALLOVER



T7

15043 | LIFE OAK



T3

15044 | CANYON CHERRY

T3

15045 | CANYON FJORD OAK



T3

15046 # CANYON AUTHENTIC WALNUT

T7

15047 # CANYON PEKON

FLOORING THAT WILL SWEEP YOU OFF YOUR FEET



Surya Click Premium presents, a carefully chosen an artistically designed range of 14 refreshing Wooden Designs that are bound to make a statement. This excellent curation of smart floor selections is your go-to-guide for contemporary floor designs.

With exclusive patterns and an assortment of shades, these floor panels are suitable for bedrooms, villas, workplaces and many more.

Surya Click laminate flooring comes with innovative click technology, time saving and cost efficient methodology.

Surya Click Premium, with its revolutionary flooring technology is unquestionably your one-stop solution for stunning maintenance-free floor designs.

Hardness & Ratings are Explained Below :

(AC) Abrasion ratings are standarized measures adopted by the Association of the European producers of laminated flooring (EPFL). AC measures abrasion resistance, impact resistance, resistance to staining, cigarette burns & thickness swelling along the edges.

AC4 can be installed in higher traffic commercial areas such as boutiques, busy & restaurants.

APPLICATIONS



VILLAS &
HOMES



LIVING
ROOM



KITCHEN



CORPORATE
OFFICE



MALLS



EXHIBITION
HALL



LIBRARY

TECHNICAL SPECIFICATIONS

PRODUCT FEATURE	TEST STANDARD	AC 4
Abrasion Resistance	EN13329	AC 4
Impact Resistance	EN13329	IC1
Stain Resistance	EN438	Group 5
Cigarette Burns	EN438	Class 5
Light Fastness	EN20105/A02	Class 7
Furniture Legs	EN426	No Damage
Chair Caster (Soft Roll)	EN425	No Damage
Thickness Swelling	EN13329	≤12%
Static Indentation	EN433	0.9 N/mm ²
Flame Resistance	En13501	CFL-S1
Impact Sound Resolution	ISO 717-2	20-22 DB
Edge Treatment		Wax Coated
Floor Design Dimensions		1190mm x 181mm x 12mm

Thickness 12 mm




Download the entire
e-catalogue here



SURYA CLICK™
Premium

Structure

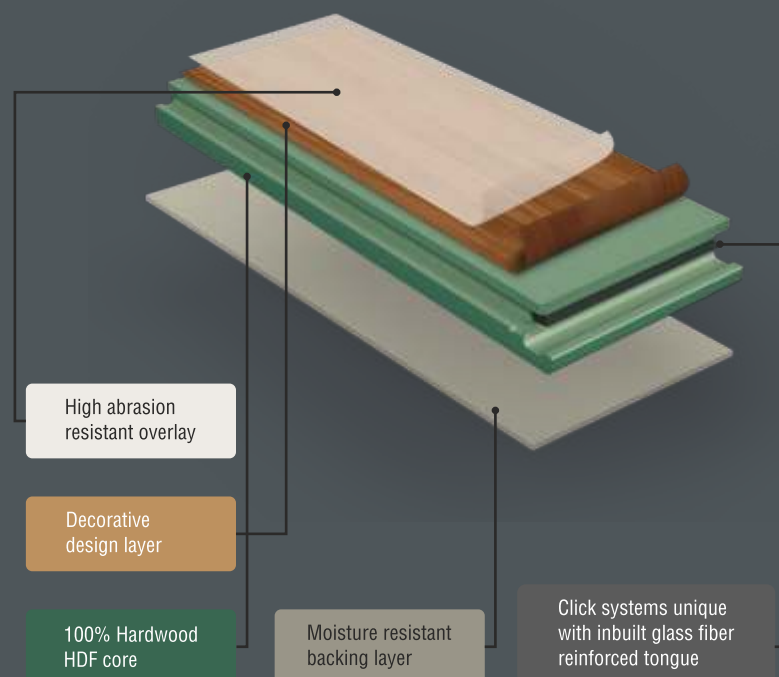

EASY TO INSTALL

Fast and easy single action installation



IMPACT RESISTANT

High resistance to impact or abrasion
from furniture legs & chair



STABILITY

Strong, resilient and dimensional stability



FIRE RETARDANT

Resistant to heat and flame



IMPROVES SOUND INSULATION

No shifting of short or long sides



SLIP RESISTANT

Skid-free and slip resistant

FEATURES



TERMITE, BORER AND FUNGUS RESISTANT



ENVIRONMENT FRIENDLY



SUITABLE FOR UNDERFLOOR HEATING



EASY TO CLEAN & MAINTAIN



CIGARETTE BURN RESISTANT



GLUE FREE INSTALLATION

Thickness : 12 mm | Pack Area : 1.292 sq. mt. | Pack Unit : 6 planks | Dimensions : 1190 x 181 x 12 mm

Marketed by :



RUSHIL

DECOR LIMITED

WE'LL MAKE IT



The mark of
responsible forestry



IGBCM190255



SURYA
PANEL

SURYA PANEL PRIVATE LIMITED

Registered Office: Plot No. 62-K, Phase-II, Amble Industrial Area, Chikmagalur, Karnataka-577101, India.

Contact Us: Ph. No.: +91-79-61400400 | info@surya-panel.com | www.suryaclick.com
Toll-Free No.: 1800 233 7952 | Fax No.: +91-79-61400401