

Canvas of your imagination

Canvas Series
Extra width
Flooring Panels



SURYA CLICK
Canvas Series

HDF LAMINATE FLOORING



15066 | Chatham Oak



15067 | Clashmoore Oak



15068 | Girona Walnut Brown



15069 | Girona Walnut Grey



15070 | Jarrah



15071 | Mauvella Oak



15072 | Pembroke Walnut



15073 | White Oiled Oak Natural Light



15074 | White Oiled Oak Natural Brown



15075 | Oak Rustic



15076 | Walnut Mocca



15077 | Oak Coffee Brown Dark





15066 | Chatham Oak

T3



15067 | Clashmoore Oak

T2



15068 | Girona Walnut Brown

T3



15069 | Girona Walnut Grey

T2



15070 | Jarrah

T2



15071 | Mauvella Oak

T3



15072 | Pembroke Walnut

T3



15073 | White Oiled Oak Natural Light

T2



15074 | White Oiled Oak Natural Brown

T2



15075 | Oak Rustic

T3



15076 | Walnut Mocca

T2




15077 | Oak Coffee Brown Dark

T3



HDF LAMINATE FLOORING

STRUCTURE

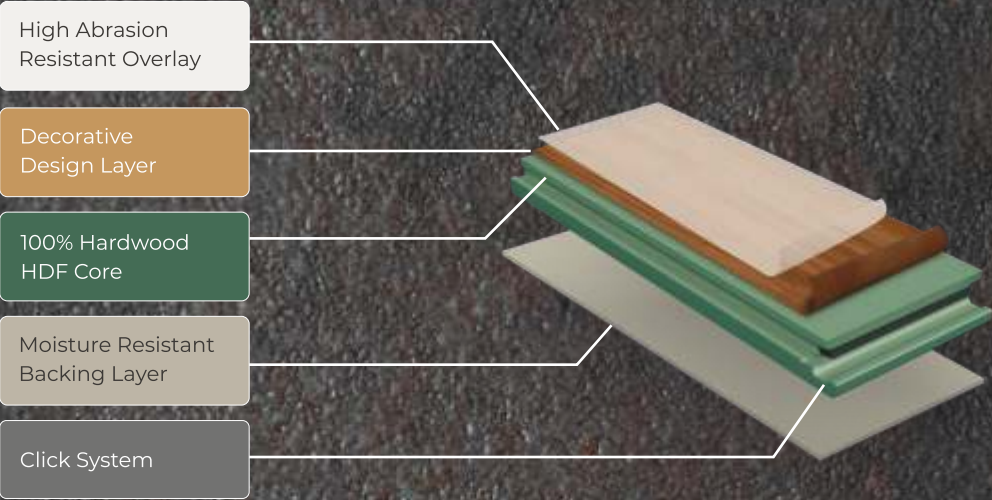

EASY TO INSTALL
Fast and easy single action installation



STABILITY
Strong, resilient and dimensional stability



IMPROVES SOUND INSULATION



IMPACT RESISTANT
High resistance to impact or abrasion from furniture legs & chair



FIRE RETARDANT
Resistant to heat and flame



SLIP RESISTANT
Skid-free and slip resistant

Range

| | |
|-----------------------|----------------------------------|
| Texture | Two Textures T2 & T3 |
| Size | Plank Size (1190 mm x 220 mm) |
| Thickness | 8 mm & 12 mm* |
| Grades / Applications | AC4 AC5* |

*subject to minimum order quantity.

FEATURES

TERMITE, BORER AND FUNGUS RESISTANT

ENVIRONMENT FRIENDLY

SUITABLE FOR UNDERFLOOR HEATING

EASY TO CLEAN AND MAINTAIN

CIGARETTE BURN RESISTANT

GLUE FREE INSTALLATION

The various classes according to usage for wear and tear are given below :

- Class 32 / AC4 : Moderate Commercial
- Class 33 / AC5 : Heavy Commercial

Laminate Flooring Rating are Explained Below :

- AC Abrasion Class are standarized measures adopted by the Association of the European producers of laminate flooring (EPFL). AC measures combines abrasion resistance, impact resistance, resistance to stains, cigarette burns & thickness swelling along the edges.
- AC4 can be installed in moderate commercial areas such as boutiques, personal cabin.
- AC5 can be installed in heavy commercial areas such as offices, showrooms & hotels.
- In all flooring application good quality door matt is recommended at entry ways to prevent dirt & sand particles coming on floors.

TECHNICAL SPECIFICATIONS

| PRODUCT FEATURE | TEST STANDARD | AC4 |
|--------------------------|---------------|---------------------------|
| Abrasion Resistance | EN13329 | AC4 |
| Impact Resistance | EN13329 | IC1 |
| Stain Resistance | EN438 | Group 5 |
| Cigarette Burns | EN438 | Class 5 |
| Light Fastness | EN20105/A02 | Class 7 |
| Furniture Legs | EN426 | No Damage |
| Chair Caster (Soft Roll) | EN425 | No Damage |
| Thickness Swelling | EN13329 | 0.18 |
| Static Indentation | EN433 | 0.9 N/mm ² |
| Flame Resistance | EN13501 | CFL-S1 |
| Floor Design Dimensions | | 1190mm x 220mm x 8mm/12mm |



Marketed by :

RUSHIL
DECOR LIMITED
WE'LL MAKE IT



SURYA
PANEL

SURYA PANEL PRIVATE LIMITED

Registered Office: Plot No. 62-K, Phase-II, Amble Industrial Area, Chikmagalur, Karnataka-577101, India.

Contact Us: Ph. No.: +91-79-61400400 | info@surya-panel.com | www.suryaclick.com
Toll-Free No.: 1800 233 7952 | Fax No.: +91-79-61400401

